AC-FIX

CSTBat IQNet

Falcon Hardware Manufacturing (Ning Bo) Co.,Ltd.
宁 波 猎 鹰 五 金 制 造 有 限 公 司

Cixi Economic Developing Zone AC-FIX Trading Co.,Ltd.
慈溪经济开发区爱思伏克斯贸易有限公司

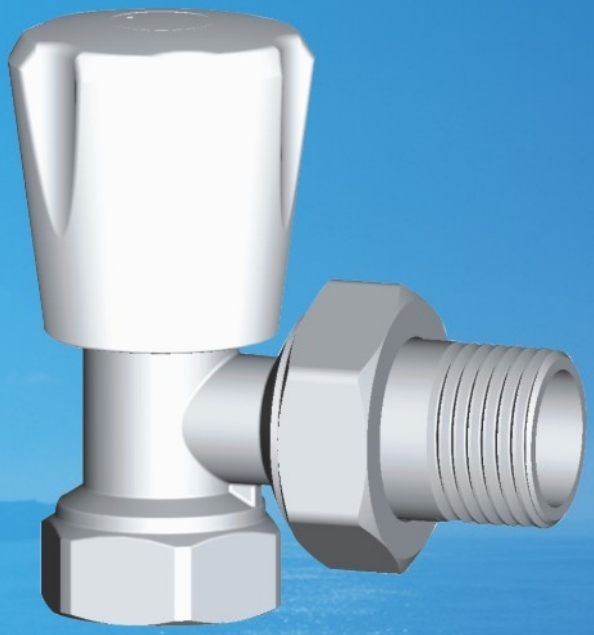

RADIATOR VALVES
散热阀

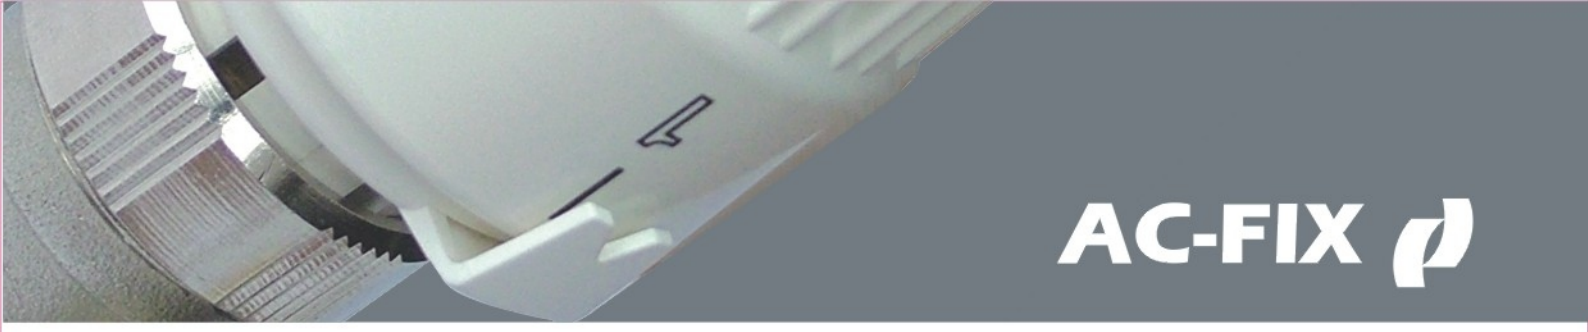

散热阀 RADIATOR VALVES

AC–FIX散热阀能够与任何型号的冷热水供应的散热器及风机盘管相匹配，他们适用于各种管子：铜管，镀锌钢管，铁管，PEX管，铝塑管等。

AC-FIX radiator valves are adaptable to all types of radiators and fan-coils supplied with cold or hot water. They can be used with all kinds of pipes: copper, galvanized steel, iron, PEX, Multilayer etc.

技术说明 TECHNICAL SPECIFICATIONS

■手动阀 MANUAL VALVES



1	手把：ABS
2,4,5,9	O型圈：EPDM70
3	阀体：黄铜表面镀镍
6	阀杆：黄铜
7	活接螺母：黄铜表面镀镍
8	管件：黄铜表面镀镍

1	Handle:ABS
2,4,5,9	O–Ring:EPDM70
3	Valve body:Brass with body surface nickel plated
6	Valve stem:Brass
7	Union nut:Brass with surface nickel plated
8	Fitting:Brass with surface nickel plated

■自动阀 THERMOSTATIC RADIATOR VALVES



1	保护帽：ABS
2	弹簧：不锈钢
3,7,8,11	O型圈：EPDM70
4	平垫：EPDM
5	阀体：黄铜表面镀镍
6	阀杆：不锈钢
9	活接螺母：黄铜表面镀镍
10	尾件：黄铜表面镀镍

1	Handle–Cap:ABS
2	Spring:Stainless steel
3,7,8,11	O–Ring:EPDM70
4	Gasket:EPDM
5	Valve body:Brass with body surface nickel plated
6	Valve stem:Stainless steel
9	Union nut:Brass with surface nickel plated
10	Fitting:Brass with surface nickel plated

■工作限制
Working Limits
■最大水压：10bar
Maximum water pressure: 10bar
■最高水温：110℃
Maximum water temperature: 110℃

注：
Note:
代码中带（*）的产品，意味着3/4"Euroconus的连接件。
In the products with (*) in the code, it means that the connexion is 3/4" Euroconus.
所有的用以连接铜管，PEX管，铝塑管的连接件，是单独出售的。
All connector sets for copper, PEX and Multilayer pipes will be supplied separately.

■手动阀 SIMPLE ADJUSTMENT RADIATOR VALVES

卡套式手动角阀
THREADED SIMPLE ADJUSTMENT ANGLE RADIATOR VALVE WITH HANDLE



尺寸(A×B)	代 码
3/8"x3/8"	MVA13838
1/2"x1/2"	MVA11212
3/4"x3/4"	MVA13434

卡套式手动角阀
MALE CONNECTION SIMPLE ADJUSTMENT ANGLE RADIATOR VALVE WITH HANDLE



尺寸(A×B)	代 码
A:3/8"-B:M24x1.5	MVA23824
A:1/2" - B:M24x1.5	MVA21224
1/2"x3/4"	MVA21234(*)

焊接式手动角阀
WELDING SIMPLE ADJUSTMENT ANGLE RADIATOR VALVE WITH HANDLE



尺寸(A×B)	代 码
3/8"xΦ12	MVA33812
1/2"xΦ15	MVA31215
1/2"xΦ16	MVA31216

母螺纹式手动直阀
THREADED SIMPLE ADJUSTMENT STRAIGHT RADIATOR VALVE WITH HANDLE



尺寸(A×B)	代 码
3/8"x3/8"	MVS13838
1/2"x1/2"	MVS11212
3/4"x3/4"	MVS13434

卡套式手动直阀
MALE CONNECTION SIMPLE ADJUSTMENT STRAIGHT RADIATOR VALVE WITH HANDLE



尺寸(A×B)	代 码
A:1/2" - B:M24x1.5	MVS21224

焊接式手动直阀
WELDING SIMPLE ADJUSTMENT STRAIGHT RADIATOR VALVE WITH HANDLE



尺寸(A×B)	代 码
1/2"xΦ15	MVS31215

■自动阀 THERMOSTATIC RADIATOR VALVES

母螺纹式自动角阀
THREADED ANGLE THERMOSTATIC RADIATOR VALVE



尺寸(A×B)	代 码
3/8"x3/8"	TVA13838
1/2"x1/2"	TVA11212
3/4"x3/4"	TVA13434

卡套式自动角阀
MALE CONNECTION THERMOSTATIC ANGLE RADIATOR VALVE



尺寸(A×B)	代 码
A:1/2" - B:M24x1.5	TVA21224
A:3/8"-B:M24x1.5	TVA23824
1/2"x3/4"	TVA21234(*)

焊接式自动角阀
WELDING ANGLE THERMOSTATIC RADIATOR VALVE



尺寸(A×B)	代 码
3/8"xΦ12	TVA33812
1/2"xΦ15	TVA31215
1/2"xΦ16	TVA31216

母螺纹式自动直阀
THREADED STRAIGHT THERMOSTATIC RADIATOR VALVE



尺寸(A×B)	代 码
1/2"x1/2"	TVS11212
3/4"x3/4"	TVS13434

卡套式自动直阀
MALE CONNECTION STRAIGHT THERMOSTATIC RADIATOR VALVE



尺寸(A×B)	代 码
A:1/2" - B:M24x1.5	TVS21224

焊接式自动直阀
WELDING STRAIGHT THERMOSTATIC RADIATOR VALVE



尺寸(A×B)	代 码
1/2"xΦ15	TVS31215

■带锁帽的散热阀 RADIATOR VALVES WITH LOCKSHIELD

母螺纹式手动角阀
THREADED ANGLE RADIATOR VALVE WITH LOCKSHIELD



尺寸(A×B)	代 码
3/8"x3/8"	LVA13838
1/2"x1/2"	LVA11212
3/4"x3/4"	LVA13434

母螺纹式手动直阀
THREADED STRAIGHT RADIATOR VALVE WITH LOCKSHIELD



尺寸(A×B)	代 码
3/8"x3/8"	LVS13838
1/2"x1/2"	LVS11212
3/4"x3/4"	LVS13434

卡套式手动角阀
MALE CONNECTION ANGLE RADIATOR VALVE WITH LOCKSHIELD



尺寸(A×B)	代 码
A:3/8"-B:M24x1.5	LVA23824
A:1/2" - B:M24x1.5	LVA21224
1/2"x3/4"	LVA21234(*)

卡套式手动直阀
MALE CONNECTION STRAIGHT RADIATOR VALVE WITH LOCKSHIELD



尺寸(A×B)	代 码
A:1/2" - B:M24x1.5	LVS21224

焊接式手动角阀
WELDING ANGLE RADIATOR VALVE WITH LOCKSHIELD



尺寸(A×B)	代 码
3/8"x Φ12	LVA33812
1/2"x Φ15	LVA31215
1/2"x Φ16	LVA31216

焊接式手动直阀
WELDING STRAIGHT RADIATOR VALVE WITH LOCKSHIELD



尺寸(A×B)	代 码
1/2"x Φ15	LVS31215

■配件 ACCESSORIES

铜管用配件
CONNECTOR FOR COPPER PIPES



尺寸(A×B)	代 码
M24X1.5 - Φ12	CC1212
M24X1.5 - Φ15	CC2415
M24X1.5 - Φ16	CC2416
3/4" - Φ12	CC3412
3/4" - Φ15	CC3415
3/4" - Φ16	CC3416

PEX管用配件
CONNECTOR FOR PEX PIPES

尺寸(A×B)	代 码
M24X1.5 - Φ12X1.1	CP2412

PEX管用配件
CONNECTOR FOR PEX PIPES

尺寸(A×B)	代 码
3/4" - Φ12x1.1	CP3412(*)
3/4" - Φ16x1.5	CP3416(*)

PEX管用配件
CONNECTOR FOR PEX PIPES



尺寸(A×B)	代 码
M24X1.5 - Φ16X1.5	CP2416

PEX管和铝塑管用配件
CONNECTOR FOR PEX AND MULTILAYER PIPES



尺寸(A×B)	代 码
M24X1.5 - Φ16X1.8/16X2	CMP2416

PEX管和铝塑管用配件
CONNECTOR FOR PEX AND MULTILAYER PIPES



尺寸(A×B)	代 码
M24X1.5 - Φ16X1.8/16X2	CMP3416(*)

铝塑管用配件
CONNECTOR FOR MULTILAYER PIPES



尺寸(A×B)	代 码
M24X1.5 - Φ18X2	CM2418

铝塑管用配件
CONNECTOR FOR MULTILAYER PIPES

尺寸(A×B)	代 码
3/4" - Φ18X2	CM3418(*)

保护帽
HANDLE FOR THERMOSTATIC VALVES

尺寸(A×B)	代 码

■温控头 THERMOSTATIC HEAD

TF-5温控头
TF-5 Thermostatic head

尺寸(A×B)	代 码
M30X1.5	TH3015-1

技术说明 Technical Specifications

- ■紧凑型设计 Compact design
- ■温度的制动装置 Blocking system of the temperature
- ■刻度：* 1-5 Position: * 1-5
- ■防冻保护：6℃ Frost protection: 6℃
- ■最大工作压力：10bar Maximum working pressure: 10bar
- ■温包是液体的 Liquid charged sensor
- ■温度范围：6-28℃ Temperature Range: 6-28℃
- ■零刻度：* With zero position: *
- ■连接螺纹M30x1,5 Connection thread M30x1,5

TF-9温控头
TF-9 Thermostatic head

尺寸(A×B)	代 码
M30X1.5	TH3015-2

技术说明 Technical Specifications

- ■紧凑型设计 Compact design
- ■温度的制动装置 Blocking system of the temperature
- ■刻度：* 1-5 Position: * 1-5
- ■防冻保护：6℃ Frost protection: 6℃
- ■最大工作压力：10bar Maximum working pressure: 10bar
- ■温包是液体的 Liquid charged sensor
- ■温度范围：6-28℃ Temperature Range: 6-28℃
- ■零刻度：* With zero position: *
- ■连接螺纹M30x1,5 Connection thread M30x1,5

太平洋保险 CPIC 本公司产品由中国人民太平洋保险公司承保

AC-FIX

Falcon Hardware Manufacturing (Ningbo) Co.,Ltd.
宁波猎鹰五金制造有限公司
Cixi Economic Developing Zone AC-FIX Trading Co.,Ltd.
慈溪经济开发区爱思伏克斯贸易有限公司
Address: China Ningbo Eurocity Industrial Park, First Seashore Road,
Hangzhou Wan New Zone, Cixi, Zhejiang, China
地址：中国浙江省慈溪市杭州湾新区欧洲工业园A区
Post Code 邮编: 315336
Phone No. 电话: +86 574 63079609 +86 574 63079620
Fax No. 传真: +86 574 63079348
E-mail: export.2@ac-fix.com (Export)
sales.china@ac-fix.com (Domestic market)
Website: www.ac-fix.com www.ac-fix.cn